


PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

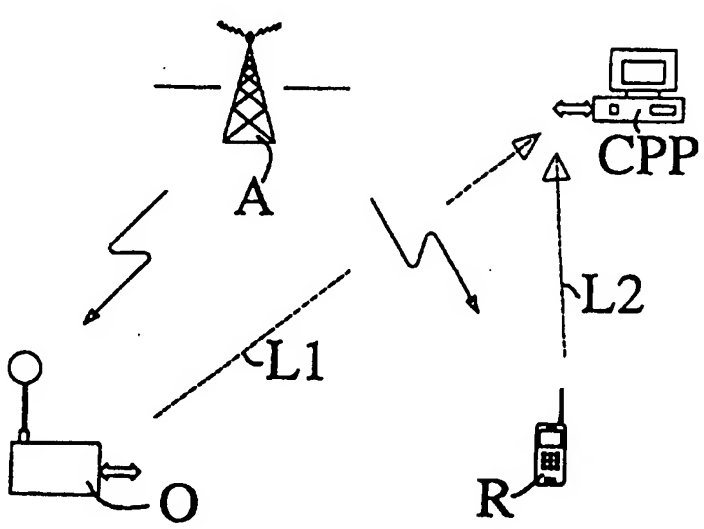

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G01S 5/10, 1/04		A1	(11) International Publication Number: WO 97/11384
			(43) International Publication Date: 27 March 1997 (27.03.97)
(21) International Application Number: PCT/GB96/02308		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, US, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).	
(22) International Filing Date: 19 September 1996 (19.09.96)		Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	
(30) Priority Data: 9519087.2 19 September 1995 (19.09.95) GB			
(71) Applicant (for all designated States except US): CAMBRIDGE POSITIONING SYSTEMS LIMITED [GB/GB]; 13 Station Road, Cambridge CB1 2JB (GB).			
(72) Inventors; and (75) Inventors/Applicants (for US only): DUFFETTT-SMITH, Peter, James [GB/GB]; 41 Denmark Road, Cottenham, Cambridge CB4 4QS (GB). GRAINGE, Keith, James, Bruno [GB/GB]; 9 Swanbourne Road, Shipton, Winslow, Buckinghamshire MK18 3JJ (GB).			
(74) Agent: GILL JENNINGS & EVERY; Broadgate House, 7 Eldon Street, London EC2M 7LH (GB).			
(54) Title: POSITION DETERMINING SYSTEM			
			
(57) Abstract			
<p>The invention relates to a position determining system, for receiving digital telephone signals transmitted by a number of transmission sources (BTS). The system has a pair of receiving stations (CBU and CRU), one at a known position (O) and another on a roving object (R); a position determining processor (CPP); and means for passing a link signal (L1 and L2), from each of the receiving stations to the position determining processor, the link signal containing information about the signals received at the receiving station from the transmission sources. Each of the receiving stations is arranged to receive the signals from the respective transmission sources substantially simultaneously. The position determining processor is arranged to compare the information received from the one receiving station with the information received at the other receiving station, and to determine the time delay between the respective signals received at both receiving stations in order to determine the position of the roving object.</p>			

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LJ	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

POSITION DETERMINING SYSTEM

This invention relates to a position determining system using radio or other broadcast transmissions. More particularly, it relates to a system using the Global System for Mobile Communications (GSM) or other digital transmission systems.

5 In our European Patent EP-B-0 303 371 we describe a radio navigation and tracking system, now known as 'CURSOR', which uses the spatial coherence of the signals from several radio transmitters to determine the position of a roving receiver. Its principles are explained in the above patent specification where it is shown how the signals received directly by the roving receiver (rover) are compared with those received
10 by a fixed base station whose location is known (base) to determine their *phase* difference, and hence the difference in range of the base and rover from each transmitter. Three such measurements made on independent transmitters are needed for navigation and tracking in two dimensions to fix the position of the rover relative to the base station and network of transmitters. The unknown quantities calculated for each new position are the spatial *x* and
15 *y* co-ordinates of the rover together with the phase offset between the local oscillators in the equipment of the two receivers. A further patent specification, WO 94/28432, shows how the same principles may be applied in tunnels and other shielded spaces such as underground car parks. Duffett-Smith and Woan (Journal of Navigation, 45, 157, 1992) describe a particular implementation of the phase-measuring system in which the signals
20 from three or more medium-wave AM public broadcast stations are used to track the position of a vehicle in and around Cambridge, UK, at speeds up to 110 km h^{-1} , with a precision of about 5 m. One of the advantages of such a system lies in the fact that no additional costly infrastructure of coherent radio transmitters needs to be set up for CURSOR operation. On the contrary, CURSOR is able to use the signals from any
25 independent radio transmitters set up for any purpose.

EP-B-0 303 371 also explains how the wider bandwidth signals of modulated transmissions may be used to measure the *time* difference between the signals received from each transmitter at the base station and the rover. In this case, the position of the peak in the cross correlation can be used as an estimator of the time difference between
30 the two received signals, and hence the difference in distance from the transmitter of the base and rover. As with the phase-measuring system, three such measurements made on

three widely-spaced transmitters suffice to calculate the spatial x and y co-ordinates of the rover together with the time offset between the oscillators in the two receiving stations.

Mobile telephones are increasingly using GSM and other digital techniques, and it would be an advantage to add time-measuring CURSOR positioning technology to provide additional services for users. However, signals radiated by digital telephone transmitters are complex and therefore there are problems to be overcome in attempting to combine the technologies.

According to the present invention there is provided a position determining system, for receiving broad band signals transmitted by a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored, the system comprising

a pair of receiving stations, in use the first of the receiving stations being at a known position and the second being located on the roving object;

a position determining processor;

means for passing a link signal from each of the receiving stations to the position determining processor, the link signal containing information about the signals received at the receiving station from the transmission sources;

wherein each of the receiving stations is arranged to receive the signals from the respective transmission sources substantially simultaneously, and the position determining processor is arranged to compare the information received from the one receiving station about the signals received at the one receiving station from the transmission sources with the information received from the other receiving station about the signals received at the other receiving station from the transmission sources, and to determine the time delay between the respective signals received at both receiving stations in order to determine the position of the roving object.

The receiving stations may receive the signals from the respective transmission sources sequentially and in the same sequence as each other.

The invention also includes a method of determining the position of a roving object, the method comprising transmitting a broadband signal from a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored; receiving the signals at a pair of receiving stations, in use a first of the receiving stations being at a known position and a second being

located on the roving object, each of the receiving stations being arranged to receive the signals from the respective transmission sources substantially simultaneously; passing link signals from each of the receiving stations to a position determining processor, the link signals containing information about the signals received at the respective receiving
5 station from the transmission sources; comparing the information received at the position determining processor from the one receiving station about the signals received at the one receiving station from the transmission sources with the information received from the other receiving station about the signals received at the other receiving station from the transmission sources; and determining the time delay between
10 the respective signals received at both receiving stations in order to determine the position of the roving object.

Additionally, the invention includes a method of estimating the offset in time of receipt of a broadcast signal received at two locations, where the signal received at the one location may have been subject to corruption by multipath effects, the method comprising
15 auto-correlating the signals received at the one location; auto-correlating the signals received at the other location; cross-correlating the signals received at the one and other locations; constructing a template comprising that portion of the auto-correlation of the signals received at the other location corresponding to the negative time axis, and that portion of the auto-correlation of the signals received at the one location corresponding to
20 the positive time axis; and measuring the offset at which the template best fits the measured cross-correlation of the signals received at the one and other locations as an estimate of the time offset between the signals received at the two locations.

In some systems, each of the receiving stations is also arranged to receive a second signal from one or more of the transmitters, said second signal being used to
25 enable compensation for changes in equipment offsets during receipt of the sequentially received signals.

The position determining processor may be co-located with one of the receiving stations or may be located remotely.

In one embodiment, the link signal from one of the receiving stations is passed
30 to the other receiving station and from the other receiving station to the position determining processor.

Preferably, for locating purposes, a signal providing information about the position of the roving object is passed from the position determining processor to at least one of the receiving stations.

5 The system may further comprise one or more monitoring stations and a signal providing information about the position of the roving object may then be passed from the position determining processor to one or more of the monitoring stations.

To provide enhanced functionality, a database server may be connected to the position determining processor, the database server containing data elements relating to a plurality of known positions; and the system further comprises means for passing
10 information about the position of the roving object determined by the position determining processor to the database server; means for retrieving data elements related to the position determined by the position determining processor; and means for passing the data elements to one of the receiving stations or to one or more of the monitoring stations.

15 The or each receiving station or the or each monitoring station preferably includes a display and the position of the roving object is displayed on the display which may be a dot matrix display.

The database server may contain graphical information and the graphical information is passed to a receiving station or monitoring station and displayed on the
20 display to indicate the position of the roving object.

The transmission sources and receiving stations preferably comprise components of a digital cellular telephone network such as a GSM network. It is advantageous if the receiving stations monitor the strength of the signals of plural transmission sources and select a plurality of sufficiently strong signals for reception.

25 The quasi-synchronisation between the signals received from the respective transmission sources is preferably achieved by monitoring receipt of a specific portion of the transmitted signals, but may be achieved, alternatively, by means independent of the transmitted signals such as a local clock signal.

The system preferably includes a series of regionally, nationally, or even
30 internationally networked fixed receiving stations to provide wide coverage and usage of the positioning system.

The receiving stations may be capable of receiving two or more channels simultaneously and it may be advantageous to repeat the reception of signals from plural transmission sources.

The description below sets out how the principles of the time-measuring
5 CURSOR system may be applied to a digital radio network, such as the GSM telephone system, to enable the position of a receiver, such as a portable telephone handset, to be measured relative to the transmitter network. The equipment used in such a network already incorporates most of that required for position fixing operation, so that its
10 implementation may be achieved with little extra cost. The precision of each position measurement is proportional (amongst other factors) to the inverse of the bandwidth of the signals; for a GSM single channel of 200 KHz bandwidth, the precision is about 50 m. Some improvement on this figure may be obtained in cases where more than three GSM transmitters can be received at both base and rover; they may all then be used in the position determining process.

15 The principles of operation of a position determining system according to the present invention, and a specific application to GSM technology, will now be described with reference to the accompanying drawings and included tables, in which:-

Figure 1 is a diagram of the basic system elements;

Figure 2 is a diagram used to define the system co-ordinates;

20 Figure 3 illustrates calculation of cross correlation functions;

Figure 4 illustrates a GSM network incorporating the time-measuring technology of the invention, and identifies the logical elements thereof;

Figure 5 illustrates the basic circuit components of a GSM handset;

25 Figure 6 illustrates a particular method of overcoming the effect of multipath propagation on measuring relative time delays;

Figure 7 (a, b, c) shows various different configurations of the elements in a GSM system incorporating the invention;

Figure 8 illustrates how position information may be displayed graphically on a small liquid crystal display;

30 Figure 9 illustrates the arrangement of elements and test sites in a trial carried out in Cambridge, UK;

Table 1 shows how the intrinsic measurement error varies with the signal to noise power ratio and the number of bits recorded; and

Table 2 gives some results from tests of a position determining system carried out in Cambridge, UK.

5

Principles of operation

Let us suppose that a transmitter, A, is broadcasting modulated radio signals within a band of frequencies of width $\Delta\nu$ centred on frequency ν_0 . The signals are received by a fixed base station, O, and a roving receiver, R, as shown in Figure 1. We define Cartesian co-ordinates (x, y) with respect to axes centred on the base station, as shown in Figure 2. The axes can have any orientation, but might conveniently be set so that the y-axis lies along the local mapping grid north-south direction. $\underline{a} = (a_x, a_y)$ is a vector which defines the position of the transmitter, and $\underline{r} = (x, y)$ defines the position of the rover. The vector $\underline{r} - \underline{a} = (x - a_x, y - a_y)$ completes the triangle OAR.

Transmitter A transmits signals continuously. At a prearranged moment the radio receivers in O and R begin receiving and recording a short length of the transmissions. This moment may for example be signalled by the arrival of a trigger transmitted from A, or a trigger derived from the normal signal traffic radiated by A, or a trigger generated locally. The last of these may be achieved, for example, by using a pulse of short duration derived from high-precision clocks at R and O which have been synchronised earlier. In a digital version of this application, the signals might first be converted from ν_0 to baseband, digitised, and then recorded in dynamic memory. Although O and R record as near simultaneously as possible, there will nevertheless be a time offset between the two records which is caused both by the difference in the distances AO and AR, and by the synchronisation error between the arrival of the trigger at O and R. Let Δt be this time offset; it is given by

$$\Delta t = \frac{[(x - a_x)^2 + (y - a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \epsilon$$

where ϵ is the synchronisation error and v is the speed of the radio waves.

An estimate of Δt may be obtained from the cross correlation of the recordings made at O and R. In Figure 1 there are shown links, L1 and L2, which represent means of

conveying representations of the recordings made at each receiving station to a position determining processor CPP. The nature of the links, whether they convey information in near real time or impose delays, is of no consequence in principle. All that matters is that duplicates of the recordings made by each receiving station are assembled together at the position determining processor for comparison with each other.

The cross correlation of the two recordings is now performed by the position determining processor using any convenient means. In the case of digital signals, this may best be carried out by a microprocessor which calculates estimates of the function at discrete intervals of time offset, τ , corresponding to the sampling interval, t_s , as shown by the dots in Figure 3. It is unlikely that the peak of the function corresponds with a particular sample, so the microprocessor must also fit an interpolation function, shown by the dashed curve, in order to obtain the best estimate of the position of the peak. The value of τ corresponding to the peak is an estimator of Δt .

This process of quasi-simultaneous recording, conveyance over one or more links, assembly of copies at one place, and estimation of the value of Δt from the cross correlation, must be performed on at least two or three spatially distinct transmitters. If there are means at O and R of synchronising sufficiently accurately, then just two measurements would generally suffice; otherwise, if ϵ is unknown as is generally the case, at least three measurements are needed. Let A, B, and C be the three transmitters in the latter case, at vector positions $\underline{a} = (a_x, a_y)$, $\underline{b} = (b_x, b_y)$, and $\underline{c} = (c_x, c_y)$. Then the three measurements of Δt are given by

$$\Delta t_a = \frac{[(x - a_x)^2 + (y - a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \epsilon$$

$$\Delta t_b = \frac{[(x - b_x)^2 + (y - b_y)^2]^{1/2} - (b_x^2 + b_y^2)^{1/2}}{v} + \epsilon$$

and

$$\Delta t_c = \frac{[(x - c_x)^2 + (y - c_y)^2]^{1/2} - (c_x^2 + c_y^2)^{1/2}}{v} + \epsilon$$

(1)

These three non-linear equations can be solved to evaluate x , y , and ϵ , and hence the position of the rover is determined. Actually, the solution of these three equations is generally ambiguous with two possible pairs of (x, y) . Often these are sufficiently far apart
 5 that it is obvious which is the correct result (for example, only one might lie within the triangle formed by the three transmitters), but if the ambiguity must be resolved automatically then an extra transmitter must be monitored.

The accuracy of the method depends on the error in the estimator of Δt derived from the cross correlation, and there are three main factors. First, the width of the cross
 10 correlation affects the accuracy of the result, since a wider function provides a less sharply-defined peak. The width is inversely proportional to the bandwidth, $\Delta\nu$, of the transmitted signals. Hence, wider bandwidth transmissions provide for more accurate intrinsic position determination. It should be noted here that the "bandwidth" could encompass *all* the signals radiated from a particular radio mast and not just one particular
 15 channel. For example, if ten adjacent channels of 200 KHz width each were active within a total bandwidth of 2 MHz, it may be possible, using a wide-band receiver or one which can receive simultaneously on more than one channel, to make use of all ten at once and thereby obtain the accuracy corresponding to a 2 MHz bandwidth. If some of the channels were inactive, it might nevertheless still be possible to obtain the full accuracy
 20 corresponding to the separation of the two channels furthest apart.

Secondly, the signal-to-noise power ratio, r , of the signals is important. Let us assume that we are recording one-bit samples of the received signals converted first to baseband. Each sample is a 'one' or a 'zero' depending on whether the signal is greater than or less than zero at the instant of sampling. We also assume that the signals are contained
 25 wholly within a uniform band of frequencies extending from zero to $\Delta\nu$, and that they are sampled at the Nyquist rate equal to $2\Delta\nu$. The error in the estimation of the position of the peak, $\Delta\tau$, is related to the average number, $q(r)$, of consecutive samples which contains just one error by the approximate expression

$$\Delta\tau \approx \frac{2\sqrt{q(r)-1}}{(q(r)-2)\Delta\nu\sqrt{N}}$$

where N is the total number of samples used in the cross correlation. The minimum value of q is 2 since even when there is no signal, the one-bit samples have an equal chance of being right as wrong. Here we have assumed that the cross correlation function is triangular in shape rather than the sinc-squared function expected for noise signals and square band-pass filters. An error of $\Delta\tau$ adds in quadratically as a position error, Δx , where $\Delta x = v \Delta\tau$. The relationship between $q(r)$ and r can be obtained from the following expressions on the assumption that the signals are noise-like:

$$q(r) = \frac{1}{P}$$

$$P = \sqrt{\frac{2}{\pi}} \int_{-\infty}^{\infty} Q(x\sqrt{r}) \exp\left(-\frac{x^2}{2}\right) dx$$

$$Q(a) = \frac{1}{\sqrt{2\pi}} \int_{-\infty}^{\infty} \exp\left(-\frac{x^2}{2}\right) dx$$

10

With Δv set to 200 KHz, the results shown in Table 1 are obtained.

Table 1

S/N Power Ratio r	q	$N = 1024$ $\Delta x/m$	$N = 4096$ $\Delta x/m$
0	2.0	∞	∞
1	4.0	81	41
2	5.1	61	31
3	6.0	52	26
4	6.8	47	24
6	8.1	41	20
10	10.3	34	17
30	17.4	25	12
100	31.5	18	9

As noted above, the errors on the measurements from each transmitter, say Δx_1 , Δx_2 , Δx_3 , must be added in quadrature with each other and with any other errors in the estimation of the position of the rover. It is interesting to note that quite good results can be obtained even in conditions of poor reception.

5 Thirdly, and usually the most important in practice, there is the error incurred by not having an accurate knowledge of the paths by which the signals reach the rover. Multipath propagation spreads out the cross correlation, making it harder to estimate the position of the peak. It may also result in a multi-peaked cross correlation with the desired peak having a lower amplitude than others. If all the signals arrive by indirect routes, there
10 may be no peak at all corresponding to the line-of-sight propagation path. It should be noted, however, that multipath propagation always results in a delay of the signals compared to the direct path. Provided that the base station antenna is in the clear above the surrounding clutter so that it receives the most direct signals only, then delayed signals at the rover always appear to the later side of the peak of the cross correlation. (In these
15 circumstances it is possible to alleviate the effects of the multipath propagation as explained later.) Having fitted an appropriate interpolation function to the discrete samples, it is important to choose the smallest value of τ at which there is a significant amount of signal as that value of Δt to be used in the calculation of the position, rather than the position of the peak itself.

20

Application to GSM

The signals radiated by the transmitters in a GSM network are complex. The flexibility and capacity built into its design are such as to render it difficult, if not impossible, to predict precisely how the allocated spectrum (near 900 MHz and 1800
25 MHz in Europe) will be used at any moment. The frequency band is split into a number of radio frequency (RF) channels of 200 KHz width, each of which carries frequency modulated (FM) signals divided in time into a sequence of frames. The basic unit is the so-called time division multiple access (TDMA) frame lasting 4.615 ms and further divided into 8 time slots. Each time slot carries 156.25 bits at a rate of 270 Kbits s⁻¹ and
30 may represent a 'normal burst' of data and training bits, a 'frequency correction burst' of fixed pattern, a 'synchronisation burst' of data and synchronisation bits, or an 'access burst' with a synchronisation sequence and data. Each of these bursts also carries header, tail,

and guard bits. How many of the time slots are being used at any moment in a given frame, and how many of the RF carriers are being broadcast from a given transmitter, depends on the way the system has been set up and on the amount of traffic at that moment. However, in the minimum case when all is quiet one of the RF carriers will
5 always be alive, carrying the so-called broadcast control channel (BCCH; a logical channel), polling for handsets in its cell by broadcasting one access burst in every TDMA frame. We can therefore rely on there being at least one FM broadcast from each transmitter mast with a bandwidth of about 200 KHz, and this we can use for position location.

10 A regional GSM network incorporating a positioning system according to the present invention might be as shown in Figure 4. Here we see base receivers, hereinafter also referred to by the acronym CBU, labelled CBU_A , CBU_B , CBU_C etc., at every GSM transmitter A, B, C etc., able to receive not only the signals from their own local transmitters but also those from at least two other distant transmitters. We also see a
15 number of handsets incorporating roving receivers, hereinafter also referred to using the acronym CRU, labelled CRU_1 , CRU_2 etc., active in the region. It is important that these handsets can also receive the signals from the same set of distant transmitters as well as from the local transmitter. As noted above, it is not necessary to achieve a high signal-to-noise ratio for reception of the distant signals, but nevertheless the need to
20 receive distant transmitters may limit the usefulness of this system in rural areas where cells are very widely separated. Also shown in Figure 4 are the position determining processor (CPP) and a service provider database (SPD). This is a device which provides position-related data specific to a request by the user of the position determining system. For example, the user may need directions to find the railway station in an unfamiliar city.
25 The position determining processor would compute the user's position and pass it to the service provider database together with the user's request. The database would respond with the required list of instructions. The configuration shown here, in which the position determining processor is a stand-alone remote unit, is just one of several possible configurations (see below). For example, the CPP and CRU might be combined together
30 inside the handset so that position processing is carried out by the handset's own computer.

There needs to be established a trigger code which is broadcast periodically from each transmitter, probably within the BCCH logical channel. As noted above, this could be a special code set up within the existing GSM framework, or it might be a repeating element of the ordinary GSM signals themselves, such as the arrival of a frame number
5 ending in three zeroes which occurs every 4 seconds. The arrival of the trigger code causes an active roving receiver (CRU) to begin the process of recording the signals from at least three transmitters. There may sometimes be a commercial advantage in making the trigger code unique to a particular operator, or even to a particular handset, thus providing one means of charging users for the position determining service. (There are of course many
10 other possible ways of charging.) The trigger code also activates the recording mechanism in the base unit (CBU) attached to the GSM transmitter. Since most GSM handsets can receive only one RF channel at once, the order in which to record the distant signals must first have been established, for example by using cell broadcast or the short message service. We see below that it might also be necessary to record the local transmitter
15 signals a second time in order to take account of drifts over the recording period. If 2048 samples are recorded for each of the two distant transmitters (1024 each of I and Q quadrature-phase signals), and 4096 samples for the local transmitter (two sets of 2048), the whole process can be completed within a few hundred ms including the time taken to switch between the channels and settle on each new frequency. The recordings made by
20 the roving receiver(CRU) and base receiver (CBU) are then sent by any convenient means to the position determining processor (CPP). The roving receiver could use, for example, slots in the GSM signals, or it could set up a data transfer call. The base receiver would probably send its recordings by landline to a remote position determining processor. The processor receives and assembles in memory its own copies of the signals received by the
25 base and roving receivers for correlation and position processing. It might also use other parameters of the signals recorded by the two receiving stations such as signal strengths.

Once the data have been assembled, the processor then performs the cross correlation analysis. Standard methods may be used, but a preferred method is described later which reduces the effects of multipath propagation. Having made estimates of Δt_a ,
30 Δt_b and Δt_c , the processor solves the equations to evaluate x and y . However, the need to receive the signals from the three transmitters sequentially introduces a complication in that the synchronisation error, ϵ , is changing all the time and is unlikely to be constant

over the period of recording. We can model this error over short periods as an offset plus a linear slope, i.e.:

$$\varepsilon = \varepsilon_0 + \varepsilon_1 t$$

where ε_0 and ε_1 are constants, and t is the time. We have a further unknown quantity to
 5 evaluate, ε_1 , and we can do this by recording the signals from the local transmitter again for a second time (at both base and rover). We now obtain four values of Δt made at sequential times t_1, t_2, t_3 , and t_4 , and equations (1) become:

$$\Delta t_a(t_1) = \frac{[(x-a_x)^2 + (y-a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \varepsilon_0 + \varepsilon_1 t_1$$

$$\Delta t_b(t_2) = \frac{[(x-b_x)^2 + (y-b_y)^2]^{1/2} - (b_x^2 + b_y^2)^{1/2}}{v} + \varepsilon_0 + \varepsilon_1 t_2$$

$$\Delta t_c(t_3) = \frac{[(x-c_x)^2 + (y-c_y)^2]^{1/2} - (c_x^2 + c_y^2)^{1/2}}{v} + \varepsilon_0 + \varepsilon_1 t_3$$

10

and

$$\Delta t_a(t_4) = \frac{[(x-a_x)^2 + (y-a_y)^2]^{1/2} - (a_x^2 + a_y^2)^{1/2}}{v} + \varepsilon_0 + \varepsilon_1 t_4$$

(2)

The first and last of these equations can be subtracted to give

$$\Delta t_a(t_4) - \Delta t_a(t_1) = \varepsilon_1(t_4 - t_1)$$

15 from which ε_1 can be found. Hence with four estimates of Δt equations (2) can be evaluated to recover x and y .

Handsets containing multi-channel receivers able to receive all three channels simultaneously do not need to repeat the recording of the signals from transmitter A since

the rate of drift between the clocks (measured by ϵ_1) is then of no consequence and does not need to be determined. High-quality single-channel handsets may also be able to dispense with the repeated recording if the drift in the clock error is small enough to ignore.

5 As noted above, almost all the hardware elements needed inside a GSM handset for the purposes of the present invention exist already for normal GSM operation. Figure 5 illustrates a typical implementation. The RF signals in the region of 900 MHz or 1800 MHz are received by antenna 1, amplified in the RF amplifier 2, and filtered in the RF bandpass filter 3, before being mixed to the intermediate frequency, IF, in mixer 4 with a
10 local oscillator signal LO_1 , generated by oscillator 5. LO_1 already incorporates the necessary channel switching ability. It is important for the present invention that its frequency is phase-locked to that of a master oscillator, MO, usually a crystal oscillator 6. This is also a requirement for normal GSM operation so it imposes no additional costs. The IF signals are amplified in amplifier 7, filtered by the bandpass filter 8, and converted
15 to baseband in quadrature mixers 9 and 10 using the signal, LO_2 , from a second local oscillator 11. As with LO_1 , this second oscillator also needs to be phase-locked to the master oscillator. However, fine tuning (automatic frequency control, AFC) is often also incorporated into the loop which must be held constant during the recording process. Quadrature outputs are filtered by the lowpass filters 12 and 13, digitised in
20 analogue-to-digital converters 14 and 15, and the bit streams labelled *I* and *Q* are produced. Position determination then just requires the microprocessor 16 to make recordings of the bit streams in dynamic ram 17 under the control of the program 18. There might be a need for some additional memory. The main modification to enable position determination is in the firmware program running on the microprocessor, and it
25 might be necessary to upgrade the processor itself to a faster model. Similar equipment is needed in the base receiving station.

A commercially limiting element in a system according to the present invention is likely to be the means by which the signals recorded at the base and rover are transferred to the position determining processor for cross correlation. It is therefore important to
30 reduce the number of bits transferred as much as possible. As noted above, one-bit sampling produces adequate results even under conditions of poor signal reception, and although slightly better accuracy can be obtained using, say, two-bit sampling, the increase

in the link load is likely to be unattractive. Indeed, it is probably better to double the number of one-bit samples, and hence double the length of the sampling interval, than to use two-bit samples. It may also be necessary to measure both I and Q channels and to perform a complex cross correlation, since the base and rover signals are unlikely to be in phase with each other, and the crystal oscillators are not locked together. Let the quadrature bit streams at the rover (CRU) be represented by I and Q (see Figure 5), where

$$I = V_1(t)\cos(\theta_1)$$

and

$$Q = V_2(t)\sin(\theta_1)$$

10 where θ_1 is the phase of the signals, and $V_1(t)$, $V_2(t)$ are their amplitudes. The corresponding quantities recorded at the base (CBU) are

$$I' = V_1'(t)\cos(\theta_2)$$

and

$$Q' = V_2'(t)\sin(\theta_2)$$

15 The microprocessor must then compute four cross correlations corresponding to II' , QQ' , IQ' , and $I'Q$, and then seek the peak in the quantity ρ , where

$$\rho = \sqrt{(II' + QQ')^2 + (IQ' - I'Q)^2}$$

The phase difference, $\theta = \theta_1 - \theta_2$, can also be obtained from

$$\theta = \tan^{-1} \left(\frac{I'Q - IQ'}{II' + QQ'} \right)$$

20 and this can be used to take out the small frequency offset between the local oscillators in the base and rover so that longer integration is possible.

Equations (1) and (2) above show how estimates of the time delays, Δt , may be used to deduce the position (x, y) of the rover and the synchronisation error, ϵ , between the base and rover. Central to this process is the accuracy with which estimates of Δt can be obtained from the cross correlations. As noted above, the major limitation to the accuracy is likely to be caused by multipath propagation of the signals from the GSM transmitter to the rover. It is assumed that the antenna at the base has been installed high enough above surrounding clutter to ensure that multipath propagation is small enough to be ignored. In these circumstances, multipath propagation to the rover causes the cross correlation profile to be spread out towards longer delay times, since the most-direct signals arrive first. The preferred method for obtaining an estimate of Δt is based on using auto-correlations (ACF) of the base and rover signals as well as the cross-correlation (CCF) between them. We use the two auto-correlations to deduce the likely shape of the cross-correlation, and then fit that 'template' to the cross-correlation to obtain the best estimate of Δt .

The two auto-correlations, ACF_{CRU} and ACF_{CBU} , together with the cross correlation, CCF, may be obtained by any of the standard means (see for example in "Random Data: analysis and measurement procedures" by J. S. Bendat and A. G. Piersol, Wiley-Interscience, 1971); we prefer the methods which involve fast Fourier transforms. The ACF_{CBU} is a good estimate of the 'intrinsic' auto-correlation of the transmitted signals (negligible multipath effect) whilst the ACF_{CRU} is likely to be corrupted by multipath signals, i.e. signals delayed by more than about 30 m equivalent path. This is shown for a particular example in Figure 6, where trace A is ACF_{CBU} and B is ACF_{CRU} . We can see that multipath has given rise to secondary peaks in trace B which appear on both sides of the main peak since the auto-correlation is always symmetrical. The 'template' is constructed by taking the left-hand portion of ACF_{CBU} (i.e. the trace to the left of the central peak in A corresponding to the negative time axis) and joining it to the right-hand portion of ACF_{CRU} (i.e. the trace to the right of the central peak in B corresponding to the positive time axis). This is shown in Figure 6 trace C. The measured CCF is shown by trace D, and we can see that the template C reproduces the major features. The estimate of the time offset, Δt , is then obtained by fitting the template to the measured CCF using any standard method, allowing the amplitudes of the two halves of the template to be free parameters as well as Δt . The fitting procedure also produces a 'goodness of fit' parameter which may be used as a basis for rejection or inclusion of the data.

In cases where more than three GSM transmitters can be received at both base and rover, it may be an advantage to use them all in the position determining process, especially if one or more of the paths is substantially indirect. In such a case, the goodness of fit parameter can provide a weighting factor for each Δt to be used in evaluating the position.

GSM handsets incorporate multi-level Analogue-to-Digital Converters (ADCs) and use adaptive processing techniques in order to reduce the errors resulting from multipath propagation. It may therefore be possible to use the demodulated signals themselves for the cross correlation function rather than the raw I and Q data streams from the receivers, depending on the design of the handset. Such extra delay put in by the adaptive processing must be removed of course, and no amount of processing can allow for the unknown extra path length of a wholly-indirect signal, but the demodulated output may nevertheless be better for estimating time-delays than the pre-processed I and Q raw data streams. Shown in dotted outline in Figure 5 is an FM discriminator 19 (FMD). FM discrimination translates a frequency offset into a steady (DC) shift in the output, so quadrature signals (I and Q) are not needed, but are replaced by a single signal (J in Figure 5). This offers two further advantages in that (a) half as much data need be transferred over the links, and (b) it is unnecessary to adjust for the frequency offset at the position determining processor thus reducing the processor overhead.

As noted above, several different configurations of a position determining system according to the present invention are possible, depending on the relative locations of the GSM transmitters (often called Base Transceiver Stations, BTSs), the roving receivers (CRUs), the base receivers (CBUs), the position determining processor (CPP), and a service provider database (SPD). Three configurations are illustrated in Figures 7a, 7b, and 7c, denoted A, B, and C. Each of these is further subdivided into two. Figure 7a shows configuration A in which the CPP and SPD are co-located at a position remote from both the CBU and CRU. This could be the case, for example, when one CPP/SPD combination serves an entire region. In A1 each BTS has a CBU co-located with it. In A2 the CBU serving the local cell embraced by the three BTS is shown somewhere within the cell. Configurations B1 and B2 (Figure 7b) are similar to A1 and A2 respectively except that there are now many CPPs. In B1 each BTS has a CBU attached to it; in B2 each triangle of three BTSs has a CPP within it of which just one is shown in the Figure. The

regional SPD remains at a remote location. Configurations C1 and C2 (Figure 7c) are similar to A1 and A2 but with the position processing carried out within each handset. Other configurations are also possible, each having relative advantages making them suited to particular commercial applications.

5 In some commercial applications, it may be an advantage to display map information in graphical form as part of the response of the service provider database to a request for a position-related service. An example of this is given in Figure 8 where it is shown how a map of the local area might be displayed on a screen attached to the position determining processor or at a monitoring station. The user has requested directions to a location marked by a filled circle labelled Z, and the position determining processor has
10 computed the user's position to be somewhere within the filled circle labelled W. The user's handset includes a liquid crystal dot-matrix display which can display small portions of the larger map as well as character-based information. The first screen displayed on the handset might be as shown in the panel marked (a) in Figure 8. This is a
15 large scale map of the local area with the circle, radius 100 m, centred on the calculated position. The roads are marked 1, 2, 3 etc., corresponding to the names indicated on the second screen, panel (b). The user can scroll back and forth between screens at will. Panel (c) shows a larger scale map of the local area, together with a pointer, K, which indicates the direction of the target destination, Z. Clearly, many other screens of information are
20 possible, including one giving the address of the target destination, local traffic conditions, approximate distance, etc. In a commercial application, there might also be scope for a limited amount of advertising on the handset display.

Tests of prototype system

25 A prototype test apparatus using a pair of standard hand portable units and some additional recording equipment was set up in Cambridge, UK. The base station (CBU) was in a three-storey building near the city centre (see Figure 9) with the antenna fixed on the roof. The roving receiver (CRU) was carried in a car to various locations in the south of the city as shown by the crosses in Figure 9. Three GSM transmitters (BTSs) were used
30 in the trial, located respectively in the city centre, at Great Shelford to the south, and at Fulbourn to the south east. Table 2 gives the mean positional errors in both co-ordinates, i.e. the differences between the averages of about 10 independent position determinations and the true positions as measured on a map. Simple data analysis techniques were used

with no special discrimination against the effects of multipath propagation. The inherent accuracy of the apparatus, found from tests with both base receiver and roving receiver side-by-side on the bench, was less than 20 m rms. Tests numbers 1 to 6 were performed with the rover stationary; tests 7-11 were made at speeds between 40 and 64 km h⁻¹.

5

Table 2:

Location number	Mean error East (m)	Mean error North (m)
1	66.5	-59.5
2	-5.5	80.0
3	-68.0	-15.0
4	89.0	90.0
5	-19.0	41.0
6	64.0	79.0
7	-73.0	6.0
8	-62.0	59.0
9	17.0	128.0
10	43.0	31.0
11	95.0	105.0

CLAIMS

1. A position determining system, for receiving broadband signals transmitted by a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored, the system comprising
- 5 a pair of receiving stations, in use the first of the receiving stations being at a known position and the second being located on the roving object;
- a position determining processor;
- means for passing a link signal from each of the receiving stations to the position
- 10 determining processor, the link signal containing information about the signals received at the receiving station from the transmission sources;
- wherein each of the receiving stations is arranged to receive the signals from the respective transmission sources substantially simultaneously, and the position determining processor is arranged to compare the information received from the one receiving station
- 15 about the signals received at the one receiving station from the transmission sources with the information received at the other receiving station about the signals received at the other receiving station from the transmission sources, and to determine the time delay between the respective signals received at both receiving stations in order to determine the position of the roving object.
- 20
2. A position determining system according to claim 1 in which the receiving stations may receive the signals from the respective transmission sources sequentially and in the same sequence as each other.
- 25
3. A position determining system according to claim 1 or claim 2, wherein each of the receiving stations is also arranged to receive a second signal from one or more of the transmission sources.
- 30
4. A position determining system according to any of claims 1 to 3, wherein the position determining processor is co-located with one of the receiving stations.

5. A position determining system according to claim 4, wherein the link signal from one of the receiving stations is passed to the other receiving station and from the other receiving station to the position determining processor.
- 5 6. A position determining system according to any of claims 1 to 3, wherein the position determining processor is located remote from the receiving stations.
7. A position determining system according to any of claims 1 to 6, wherein a signal providing information about the position of the roving object is passed from the
10 position determining processor to at least one of the receiving stations.
8. A position determining system according to any of claims 1 to 7, further comprising a monitoring station and wherein a signal providing information about the position of the roving object is passed from the position determining processor to the
15 monitoring station.
9. A position determining system according to any of claims 1 to 8, further comprising
a database server connected to said position determining processor, said
20 database server containing data elements relating to a plurality of known positions;
means for passing information about the position of the roving object determined by the position determining processor to the database server;
means for retrieving data elements related to the position determined by the position determining processor; and
25 means for passing the data elements to one of the receiving stations or to the monitoring station.
10. A position determining system according to any of claims 1 to 9, wherein the or each receiving station or the monitoring station includes a display and the position of
30 the roving object is displayed on the display.

11. A position determining system according to claim 10, wherein the display comprises a dot matrix display.
12. A position determining system according to claim 10 or claim 11 when
5 dependent on claim 9, wherein the database server contains graphical information and said graphical information is passed to the receiving station or monitoring station and displayed on the display to indicate the position of the roving object.
13. A position determining system according to any of the preceding claims,
10 wherein the transmission sources and receiving stations comprise components of a digital cellular telephone network.
14. A position determining system according to claim 13, wherein the digital
15 cellular telephone network is a GSM network.
15. A position determining system according to any of the preceding claims,
wherein the receiving stations monitor the strength of the signals of plural transmission sources and select a plurality of sufficiently strong signals for reception.
- 20 16. A position determining system according to any of claims 1 to 15, wherein the quasi-synchronisation between the signals received from the respective transmission sources is achieved by monitoring receipt of a specific portion of the transmitted signals.
- 25 17. A position determining system according to claim 15 wherein the quasi-synchronisation between the signals received from the respective transmission sources is achieved by means independent of the transmitted signals.
- 30 18. A method of determining the position of a roving object, the method comprising transmitting broadband signals from a number of transmission sources equal at least to the number of dimensions in which the movement of a roving object is to be monitored; receiving the signals at a pair of receiving stations, in use the first of the receiving stations

being at a known position and the second being located on the roving object, each of the receiving stations being arranged to receive the signals from the respective transmission sources substantially simultaneously; passing link signals from each of the receiving stations to the position determining processor, the link signals containing information
5 about the signals received at the respective receiving station from the transmission sources; comparing the information received at the position determining processor from the one receiving station about the signals received at the one receiving station from the transmission sources with the information received from the other receiving station about the signals received at the other receiving station from the transmission sources; and
10 determining the time delay between the respective signals received at the receiving stations in order to determine the position of the roving object.

19. A method according to claim 18, wherein the broadcast signal is a digital cellular telephone network transmission signal.

15

20. A method of estimating the offset in time of receipt of a broadcast signal received at two locations, where the signal received at the one location may have been subject to corruption by multipath effects, the method comprising auto-correlating the signals received at the one location; auto-correlating the signals received at the other location;
20 cross-correlating the signals received at the one and other locations; constructing a template comprising that portion of the auto-correlation of the signals received at the other location corresponding to the negative time axis, and that portion of the auto-correlation of the signals received at the one location corresponding to the positive time axis; and measuring the offset at which the template best fits the measured cross-correlation of the
25 signals received at the one and other locations as an estimate of the time offset between the signals received at the two locations.

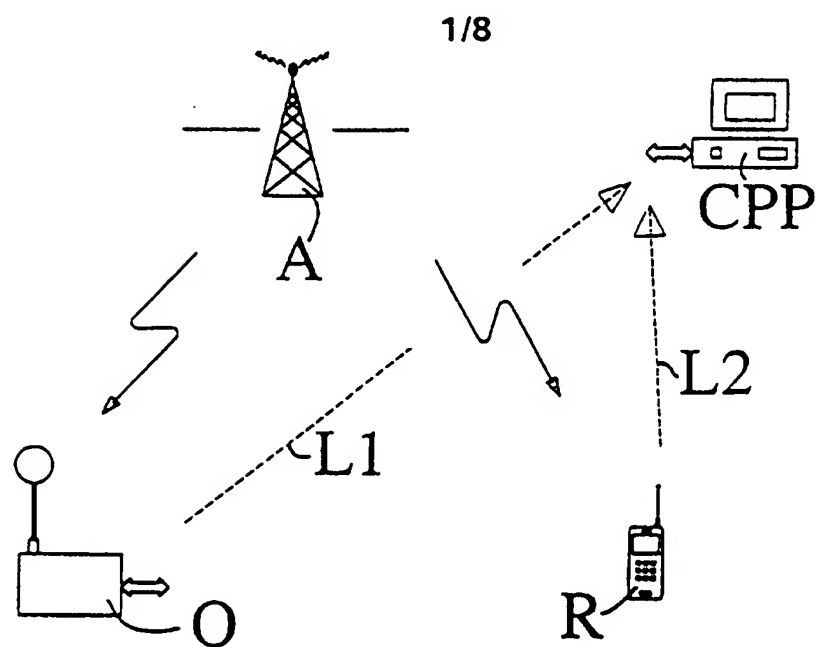


Figure 1

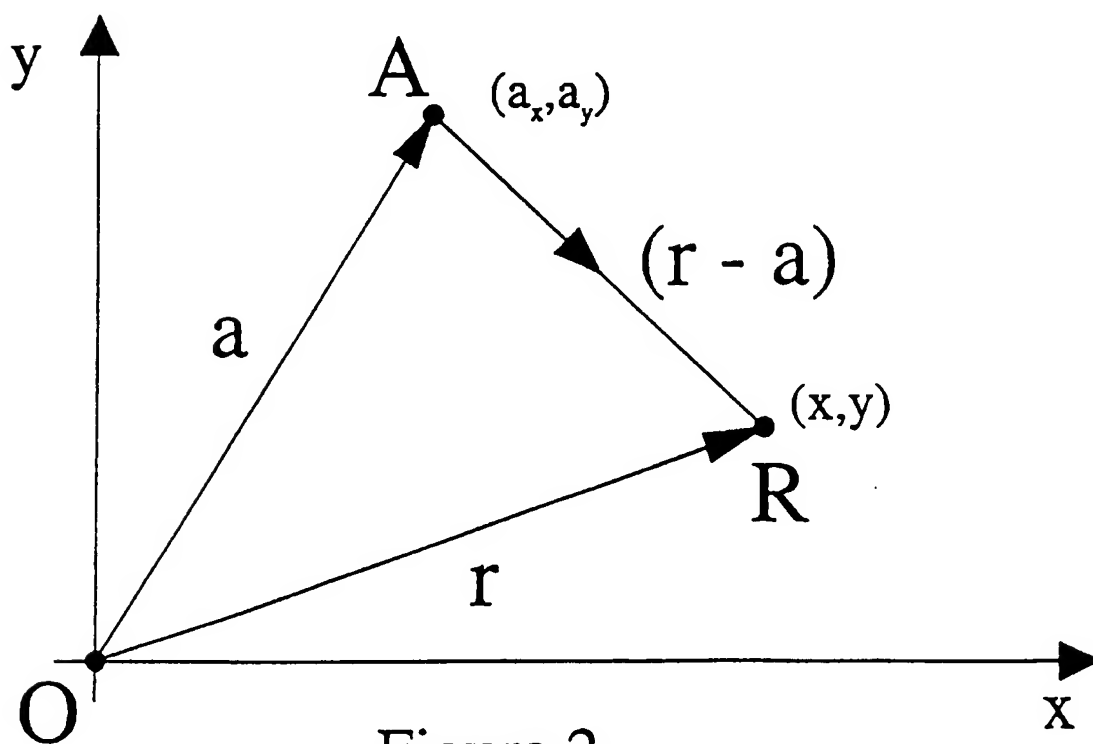


Figure 2

2/8

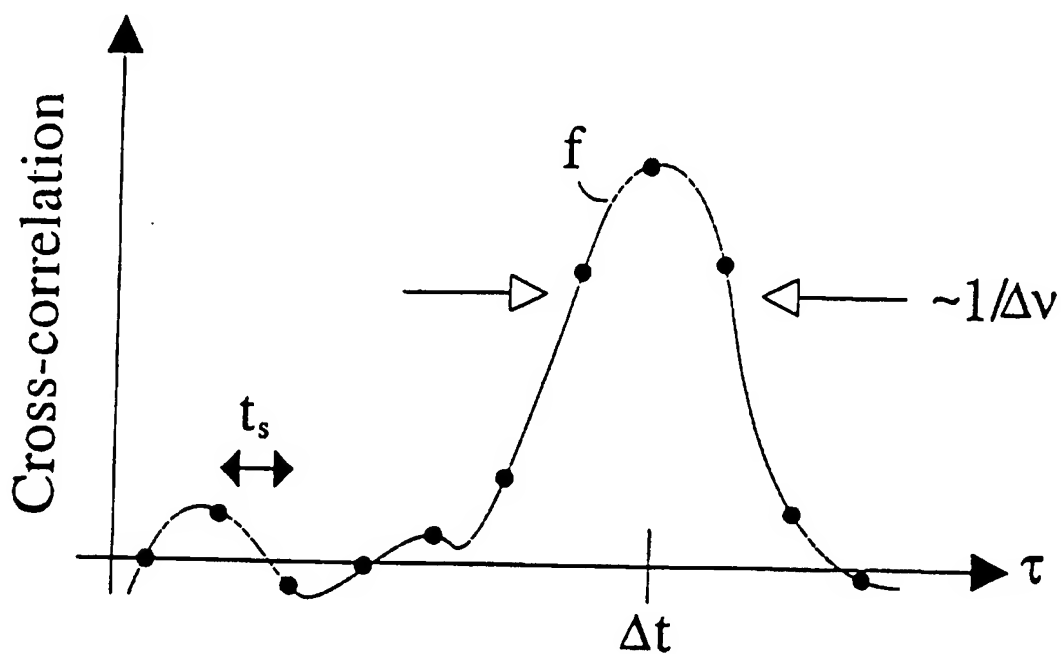


Figure 3

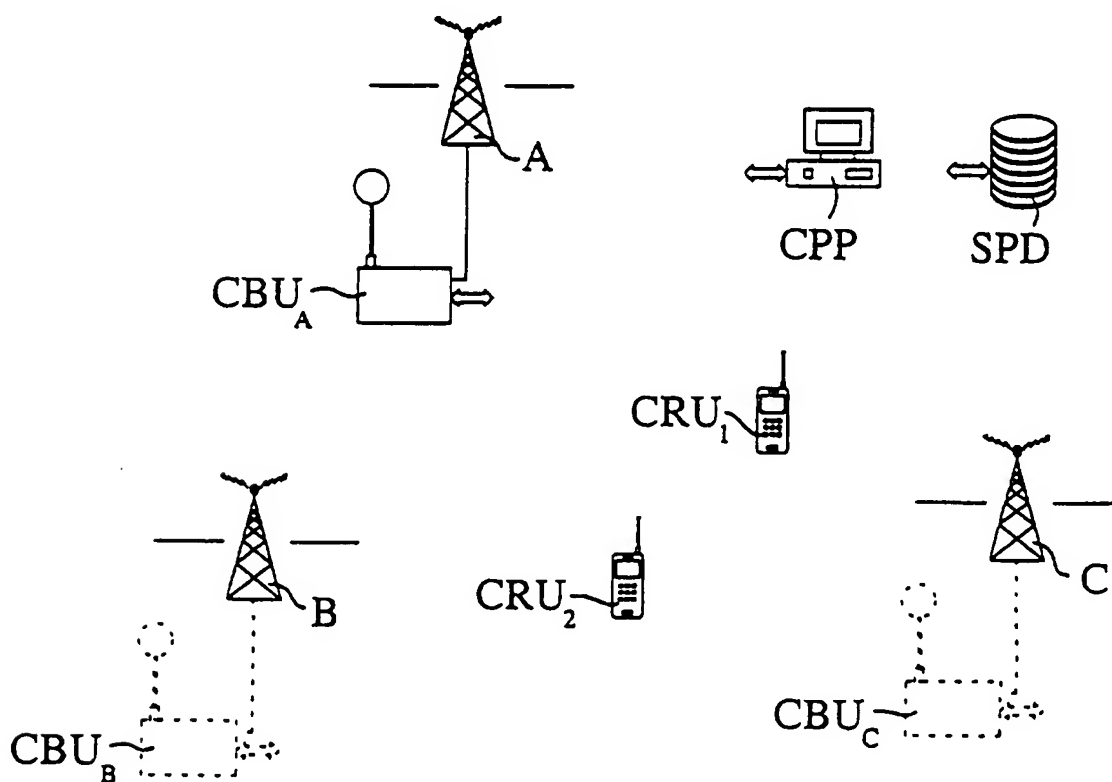


Figure 4

3/8

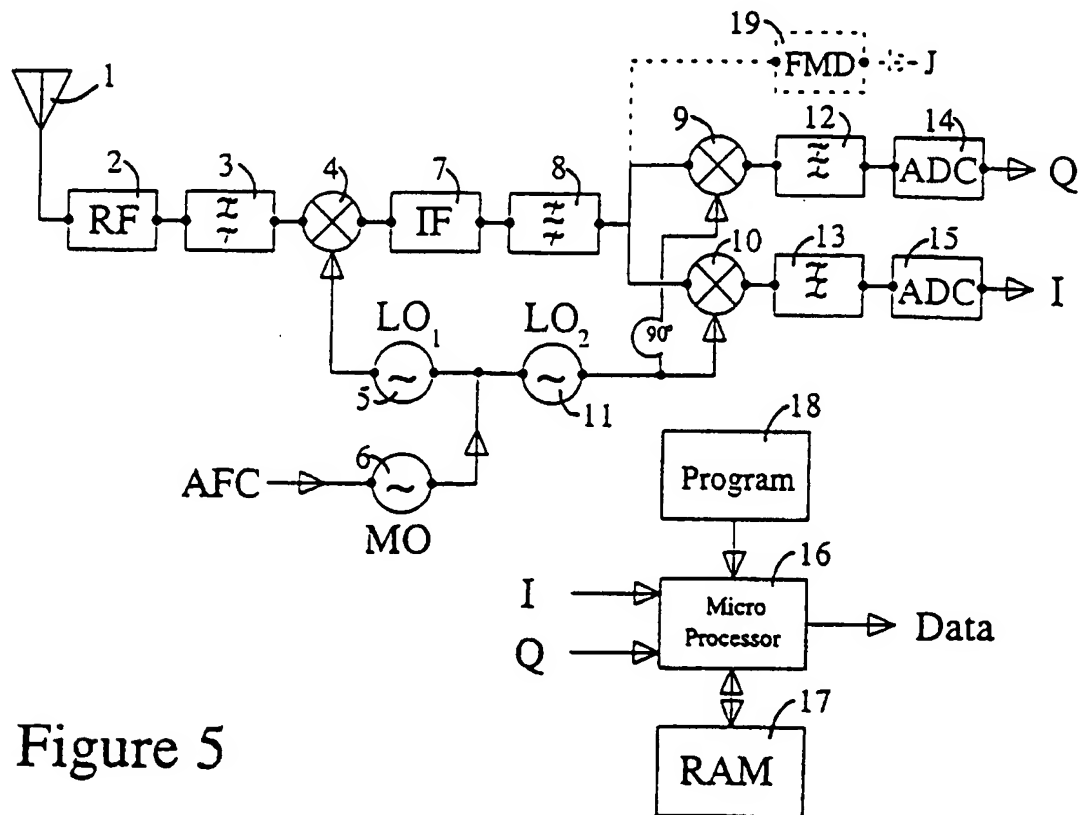


Figure 5

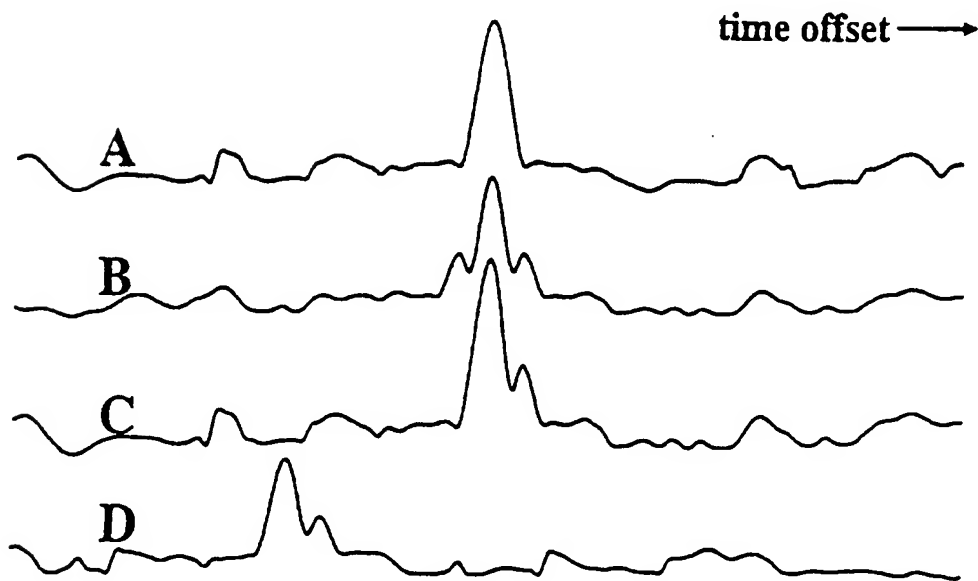


Figure 6

4/8


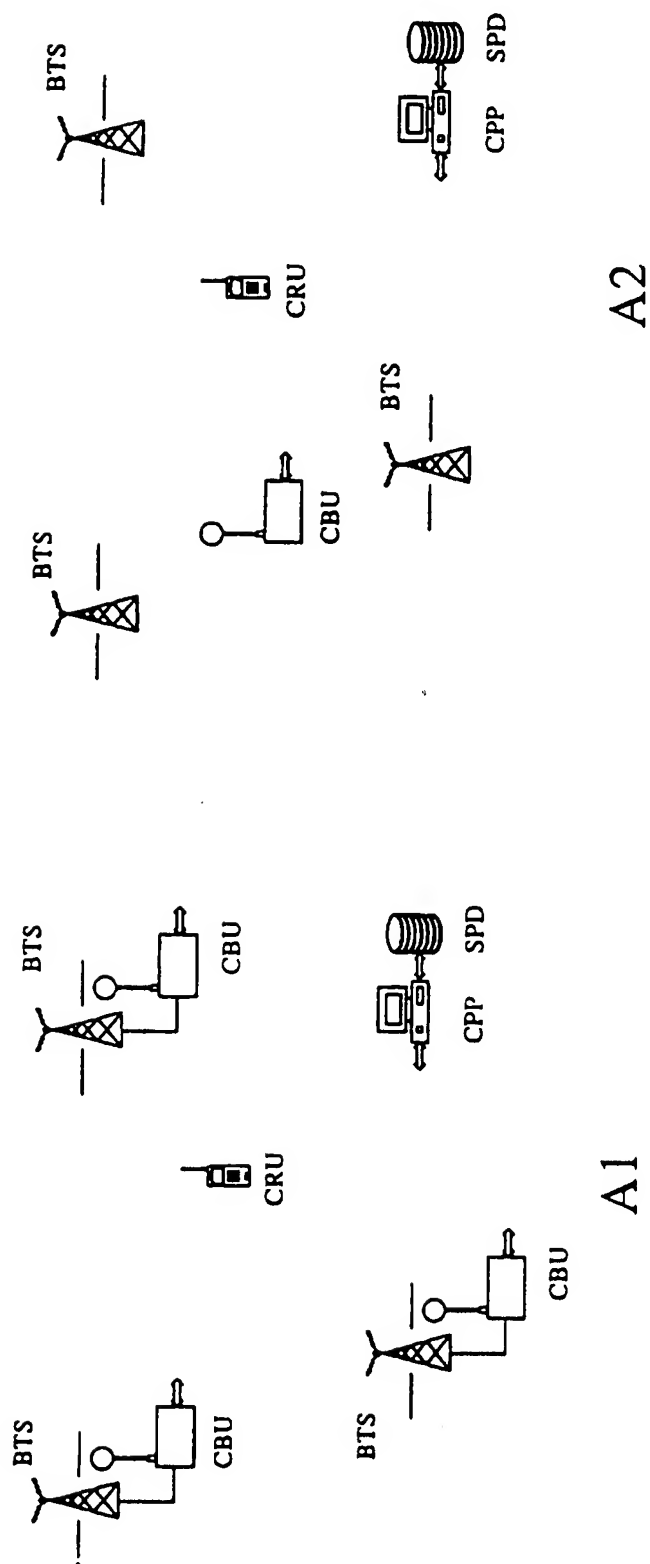


Figure 7(a)

5/8

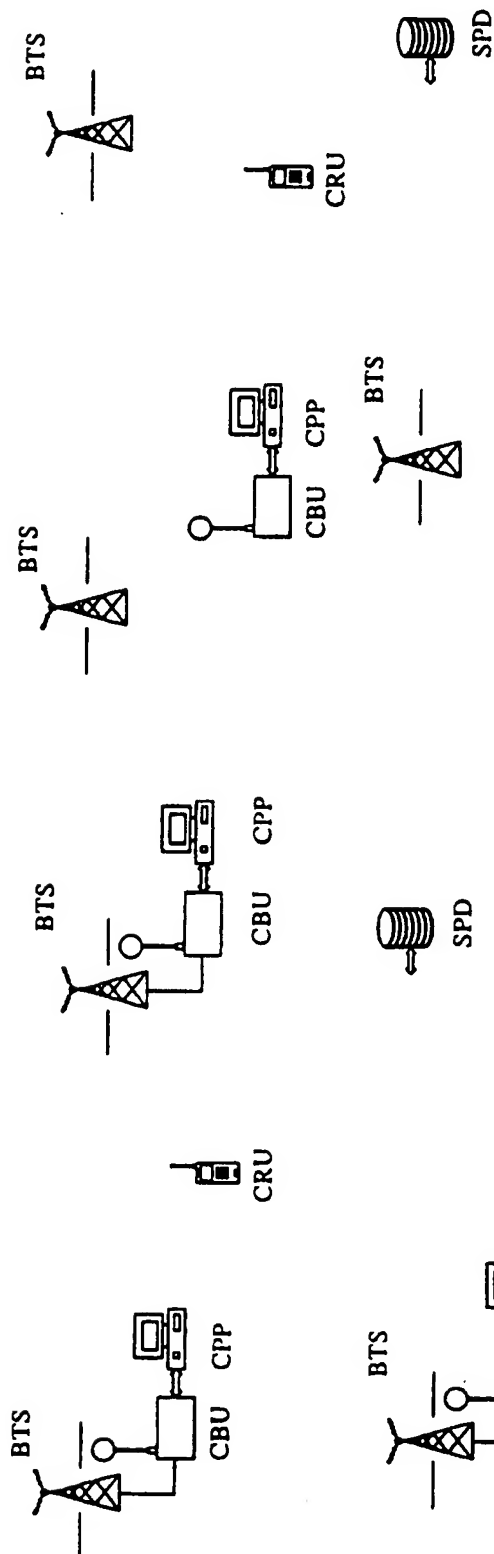

B2

Figure 7(b)

B1

6/8

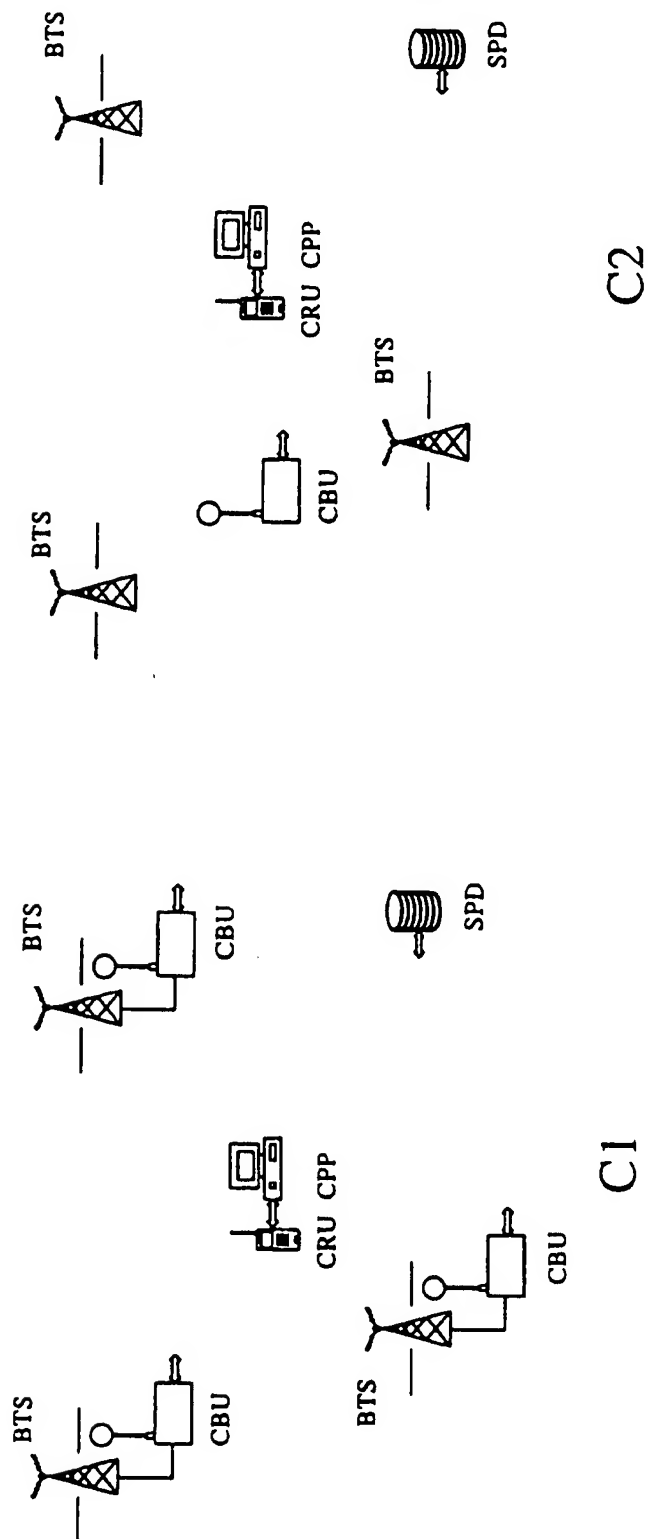


Figure 7(c)

7/8

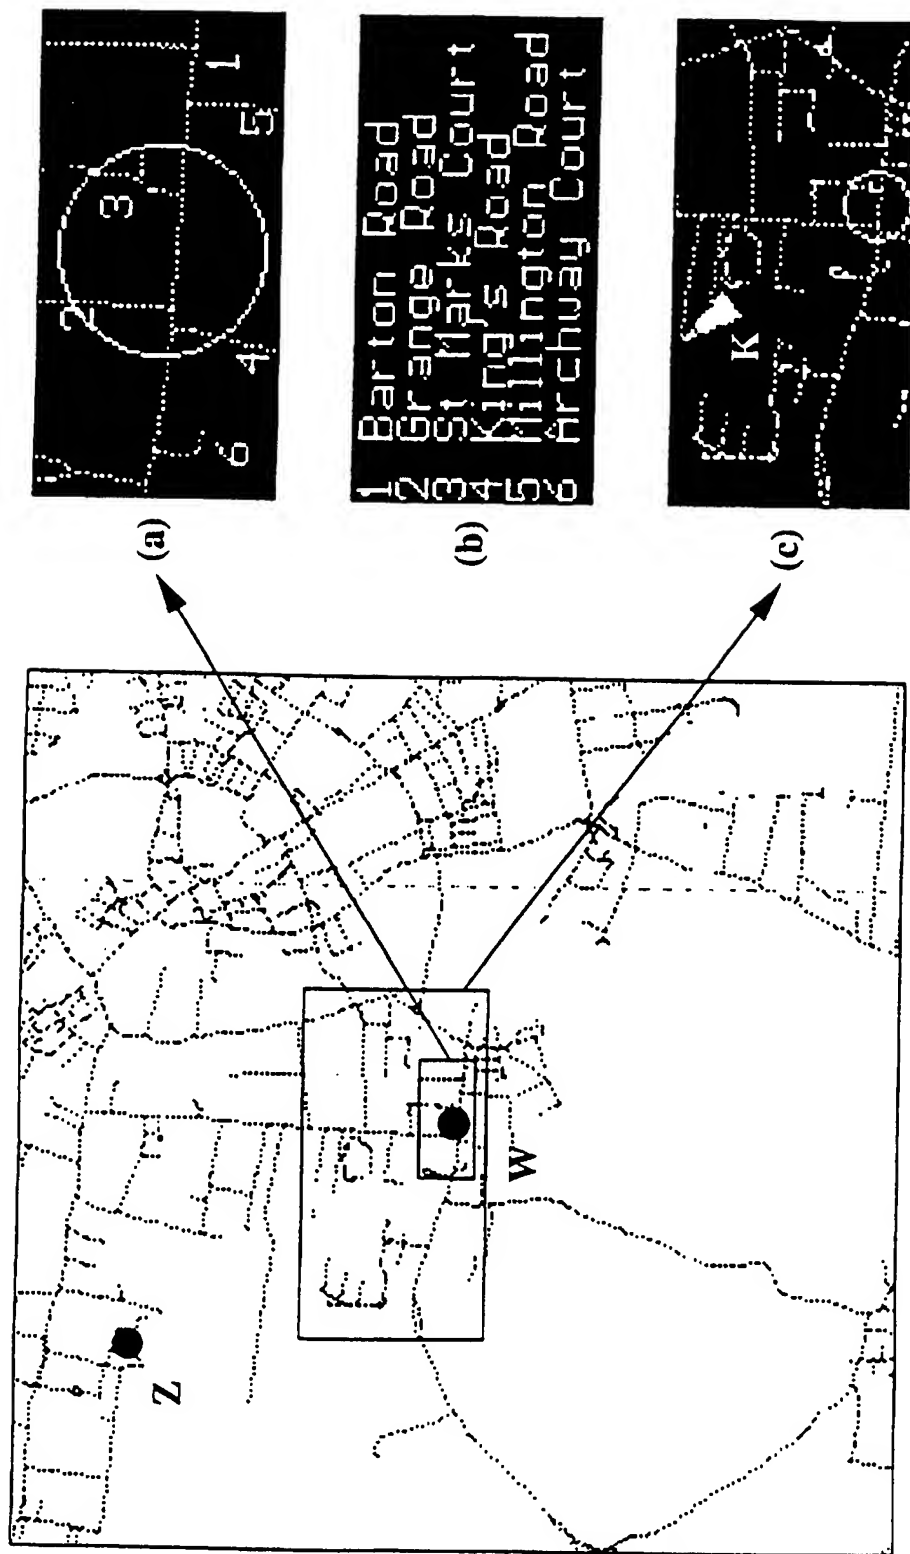


Figure 8

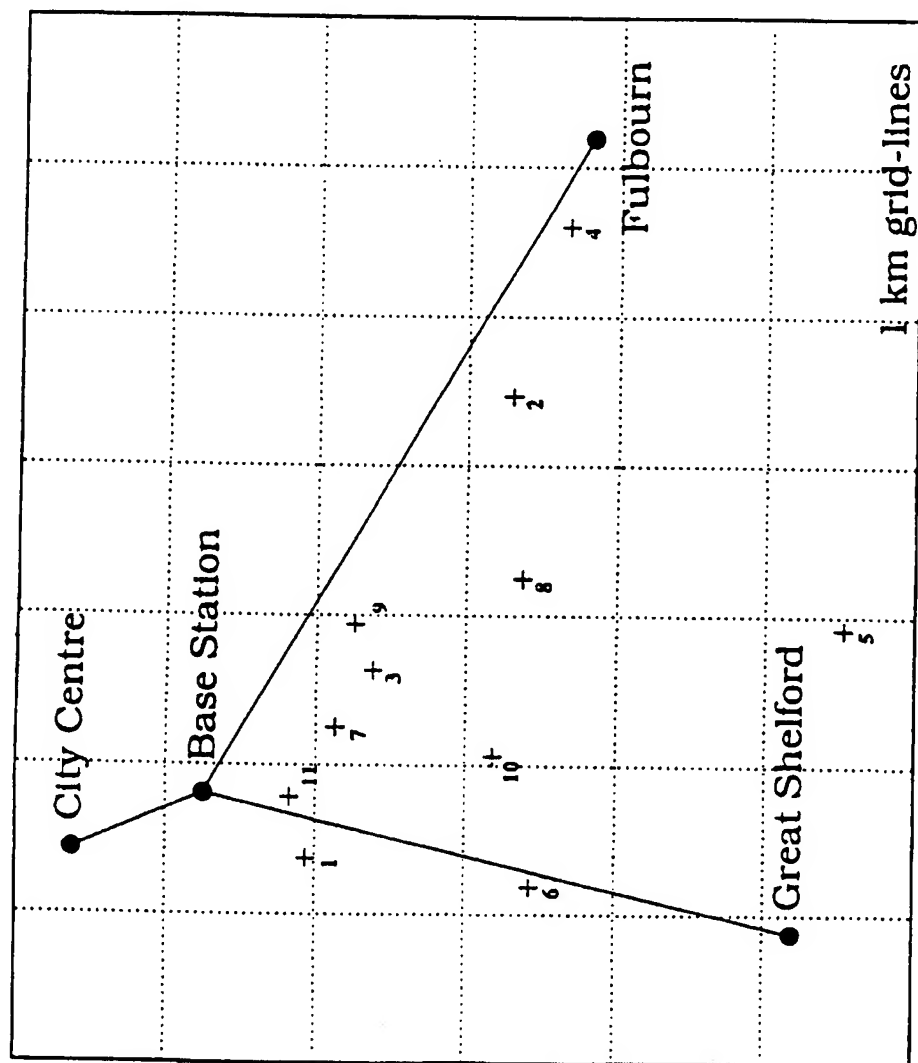


Figure 9

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02308

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 G01S5/10 G01S1/04		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 G01S H04B H04Q		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 303 371 A (DUFFETT SMITH PETER JAMES) 15 February 1989 cited in the application	1-6,8, 10,11, 15,17,18
Y	see column 3, line 11 - line 14 see column 6, line 19 - line 34 ---	13,14,19
X	WO 95 23981 A (STANFORD TELECOMM INC) 8 September 1995 see page 7, line 19 - page 8, line 7 ---	1,2, 4-12,16, 18
X	EP 0 444 738 A (PHILIPS ELECTRONICS UK LTD ;PHILIPS NV (NL)) 4 September 1991	1,18
A	see column 5, line 13 - column 7, line 7 ---	16
Y	EP 0 647 076 A (FINANC POUR LE RADIOTELEPHONE) 5 April 1995 see column 7, line 34 - column 8, line 57 ---	13,14,19
-/-		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "d" document member of the same patent family		
Date of the actual completion of the international search 20 February 1997		Date of mailing of the international search report - 4. 03. 97
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl, Fax (+ 31-70) 340-3016		Authorized officer Haffner, R

INTERNATIONAL SEARCH REPORT

International Application No
PCT/GB 96/02308

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 327 144 A (STILP LOUIS A ET AL) 5 July 1994 see column 15, line 17 - line 53 ---	20
A	EP 0 318 685 A (MOTOROLA INC) 7 June 1989 see the whole document ---	20
A	MRC MOBILE RADIO CONFERENCE 1991, NICE, FRANCE, 13-15 NOV. 1991, 1991, VALBONNE, FRANCE, SEE, FRANCE, pages 51-55, XP000391318 MOULY M ET AL: "The pseudo-synchronisation, a costless feature to obtain the gains of a synchronised cellular network" see the whole document -----	20

INTERNATIONAL SEARCH REPORT

International application No.

PCT/GB 96/ 02308

Box I Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. Claims 1-19: directed to a position determination system
2. Claim 20: directed to signal processing method to recover a signal after multipath corruption

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

Information on patent family members

In tional Application No

PCT/GB 96/02308

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-0303371	15-02-89	AU-A- 2120788	09-03-89
		CA-A- 1314964	23-03-93
		DE-A- 3879032	15-04-93
		EP-A- 0377592	18-07-90
		WO-A- 8901637	23-02-89
		HK-A- 38994	29-04-94
		JP-T- 2504673	27-12-90
		NO-B- 177944	11-09-95
		US-A- 5045861	03-09-91
WO-A-9523981	08-09-95	US-A- 5510801	23-04-96
		AU-A- 1928195	18-09-95
EP-A-0444738	04-09-91	GB-A- 2241623	04-09-91
		JP-A- 5030024	05-02-93
		US-A- 5119102	02-06-92
EP-A-0647076	05-04-95	FR-A- 2711023	14-04-95
		FR-A- 2711033	14-04-95
US-A-5327144	05-07-94	AU-A- 6094094	12-12-94
		AU-A- 6820694	12-12-94
		BR-A- 9406463	30-01-96
		CA-A- 2161333	24-11-94
		EP-A- 0700525	13-03-96
		JP-T- 8508381	03-09-96
		WO-A- 9427160	24-11-94
		WO-A- 9427161	24-11-94
EP-A-0318685	07-06-89	ZA-A- 9401019	25-08-94
		US-A- 4829543	09-05-89
		CA-A- 1291280	22-10-91
		DE-D- 3888793	05-05-94
		DE-T- 3888793	11-08-94
		ES-T- 2050692	01-06-94
		JP-A- 1190153	31-07-89